



®

⚠

○

○

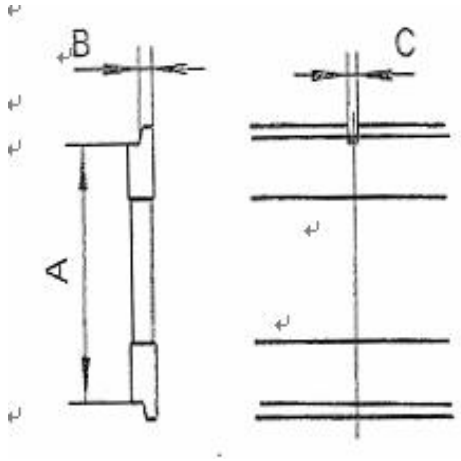
B
C
A

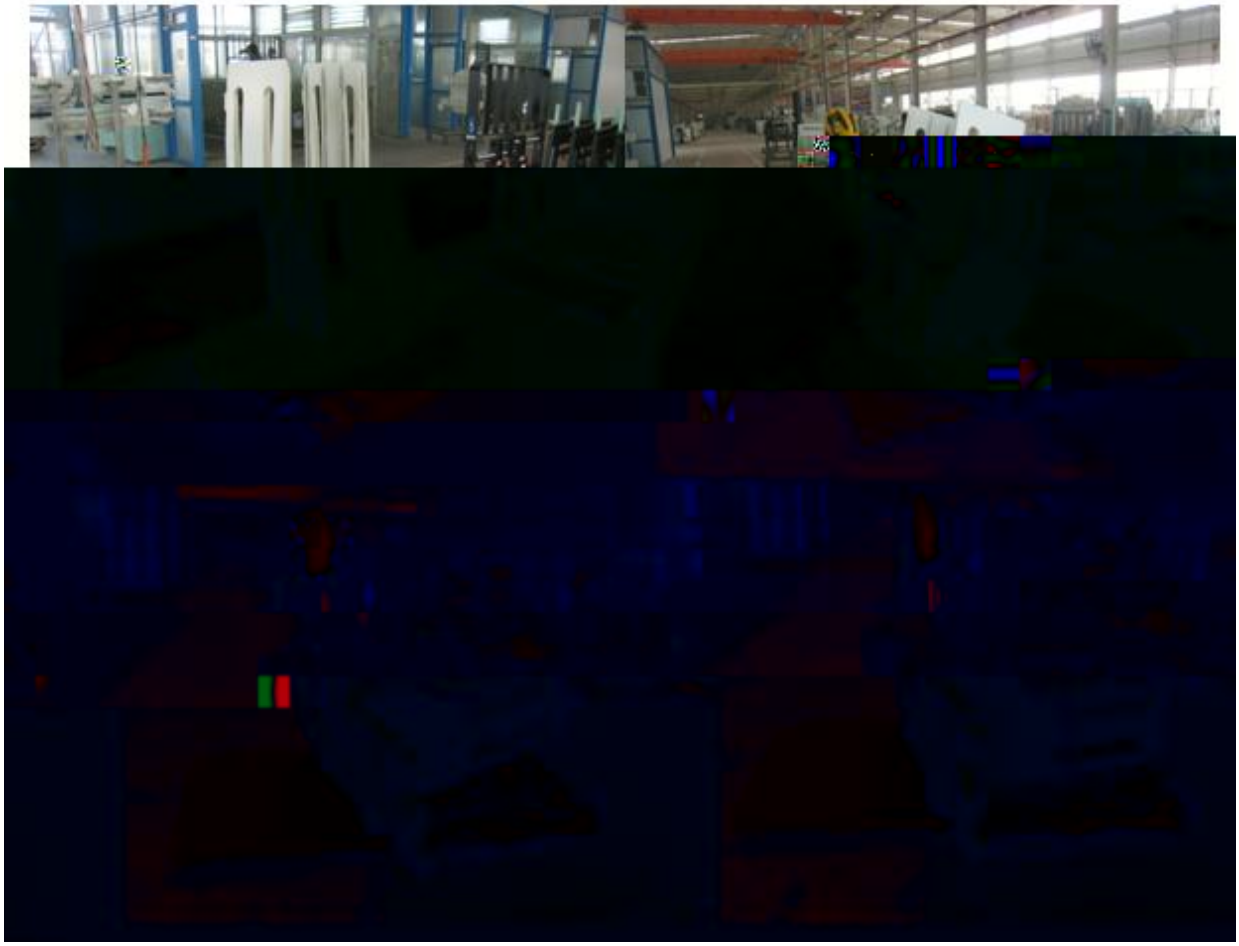

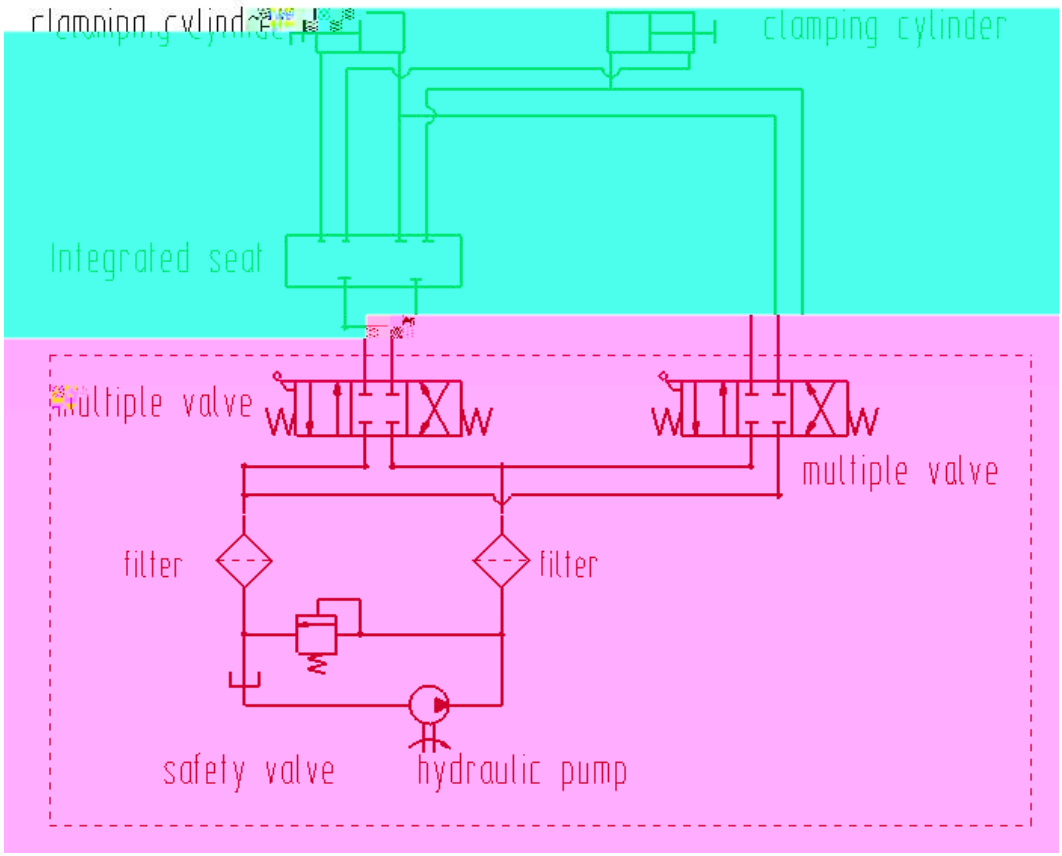
clamping cylinder
clamping cylinder
integrated seat
multiple valve
multiple valve
filter
filter
safety valve
hydraulic pump

⚠

SU

W P Q

T #%7 R

VW

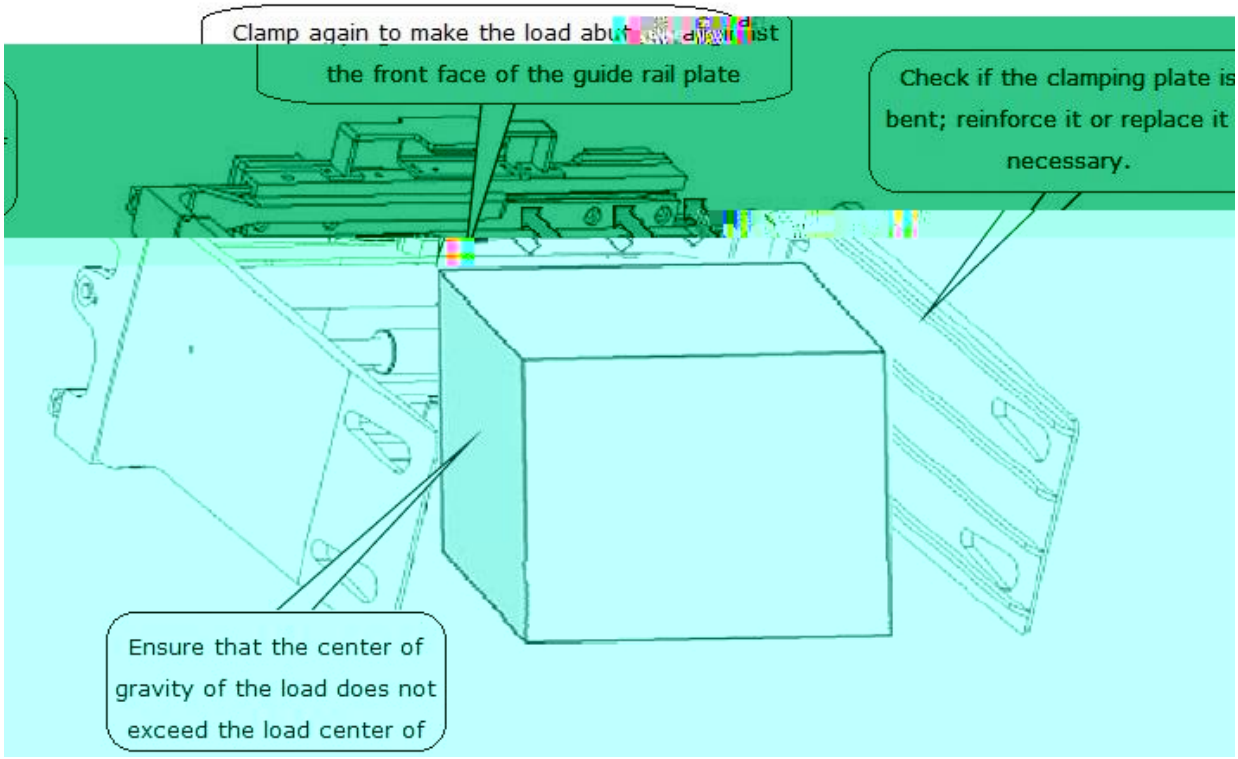
Clamp again to make the load abut against the front face of the guide rail plate
Check if the clamping plate is bent; reinforce it or replace it necessary.
Ensure that the center of gravity of the load does not exceed the load center of

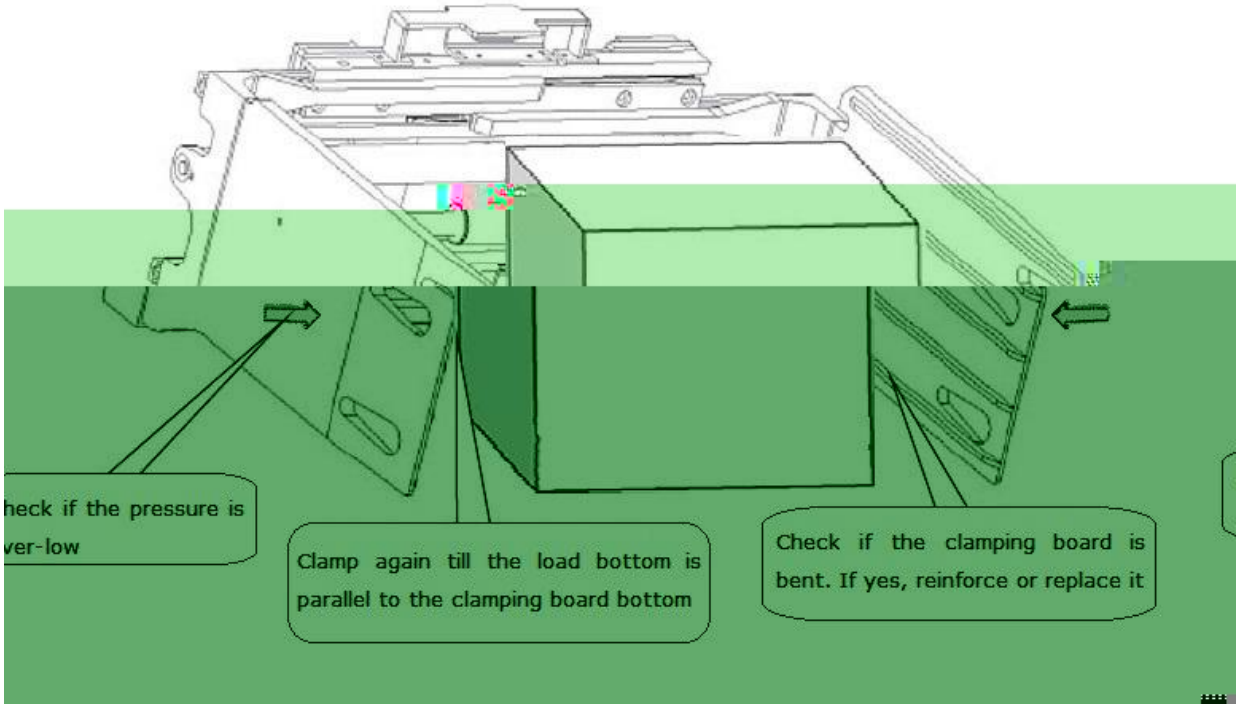
heck if the pressure is
ver-low
Clamp again till the load bottom is parallel to the clamping board bottom
Check if the clamping board is bent. If yes, reinforce or replace it

= RPQGHP W+

&Re„pQYHU